HEIMBERG

TECHNICAL DATASHEET





HEIMBERG-PRO- SLIM: Pre-wall installation system for dry build up (plasterboard).

SPECIFICATIONS

INFORMATION

Product Model Number: HBC-PRO-1101-1200

WC-mounting element with flushing cistern for operation from the front. Suitable for brick-lining and front-wall installation depth is only 84 mm

For mounting in front of a support wall or in to a plasterboard construction

For installation of wall hung WC pans with a connecting pitch of 180 mm or 230 mm

For floor thickness 0-100 mm

For wall-hung WC

Technical specifications

Recommended range of water pressure 0,3-0,5 MPa Functional range of water pressure 0,01,6 MPa Hygienic reserve 2 I Small flush 2,5 -3,5 I


Water volume in the cistern 6 I

Water connection from the back or top via mounting holes G1/2 " Factory setting of small flush 2 I

Factory setting of large flush 4 I big flush 3,5-6 I

Load test 400 kg

DRAWING

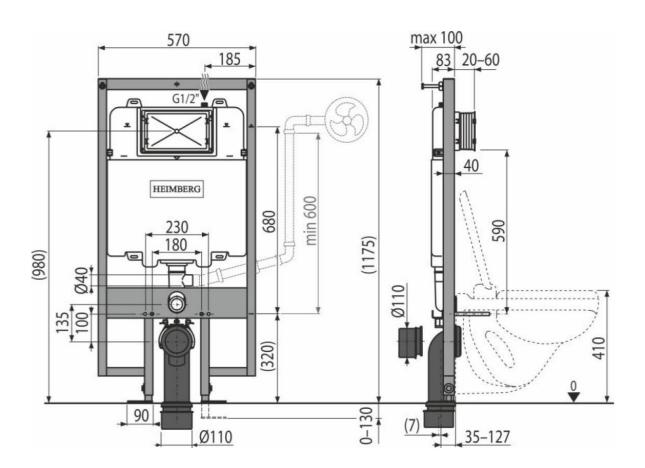

For more information's about this product or our full product range please contact us: Email: info@heimbergintl.com

HEIMBERG