# **HEIMBERG**

## TECHNICAL DATASHEET





### **HEIMBERG-316XL: OUTDOOR FLOOR MOUNTED SHOWER COLUMN**

## SPECIFICATIONS INFORMATION

Product Model Number: HBM-316XL-188-SS

Surface Treatment Brushed Nickle

**Product Mode** 316XL Outdoor Floor Mounted Shower Column **Material: Body:** SUS316L, Cartridge: 35mm Sedal Cartridge,

Neoperl Aerator, Connection Size: 1/2"

Recommended water pressure: 1-5 bar

MAX Pressure: 8 bar

Hot water inlet temperature MAX 90°C

Recommended operating temperature (energy saving) : 45°C

Attention: If the static pressure exceeds 5bar, a pressure reducing valve must be installed to avoid the pressure

difference when the hot and cold water is supplied

### **Technical Information:**

316XL Outdoor Floor Mounted Shower Column


Mounting Type: Floor mounted


Diverter Type: Turn Spout Type: Swivel Spout Spout length: 420 MM Fixing Kit: Included


Stainless Steel Grade: 316L

Included : Shower Column Fixed kit

## **DRAWING**

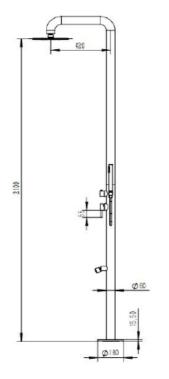

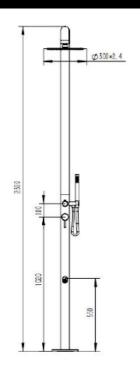

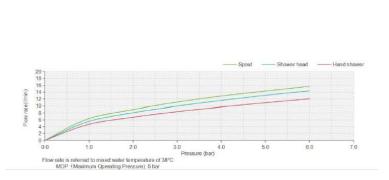

For more information's about this product or our full product range please contact us:

Email: info@heimbergintl.com